


CALCIUM FLUORIDE 45°/45°/90° PRISM

MATERIAL: UV Grade CaF₂

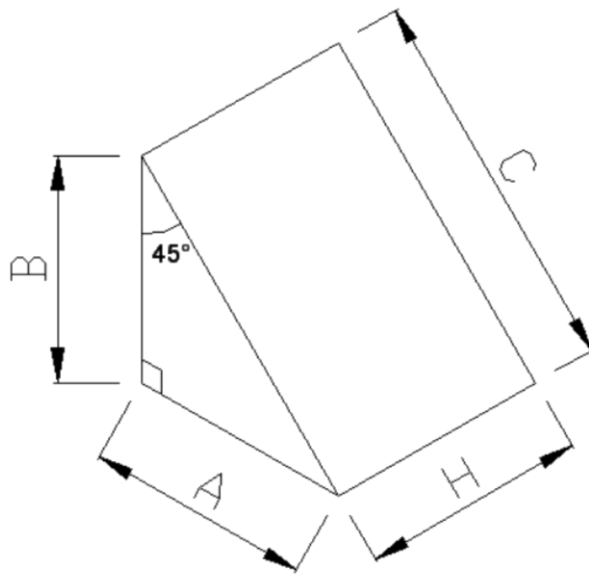

A = B = 25mm (± 0.1 mm)
C = 35.4mm (± 0.1 mm)
H = 25mm

Angular Tolerance ± 6 arc min
Three faces polished flatness $< 1/2$ at 633nm (70% C.A.)
Scratch/Dig 40-20
Chamfers ~ 0.1 mm all edges

Issue A	12/06 KJM

CRYSTRAN LTD 1 Broom Road Business Park, Poole, BH12 4PA
Title: CaF₂ 45° Prism
DRG # CAFPRISM25-45U